

A s'ort of s'ort to ort n'rtion  
o'rt of n'rtion ov rpos'n pr'sson


ron Duv v'n' B'r' on E'n'  
A Jon'n How' H'r Bu ton

c'f' s'

Jon'n

I - 1

UNIVERSITY OF




---

Co n'rt v' n'rt  
s'ort of r's

---

A similarity-based method for the generalization  
of face recognition over pose and

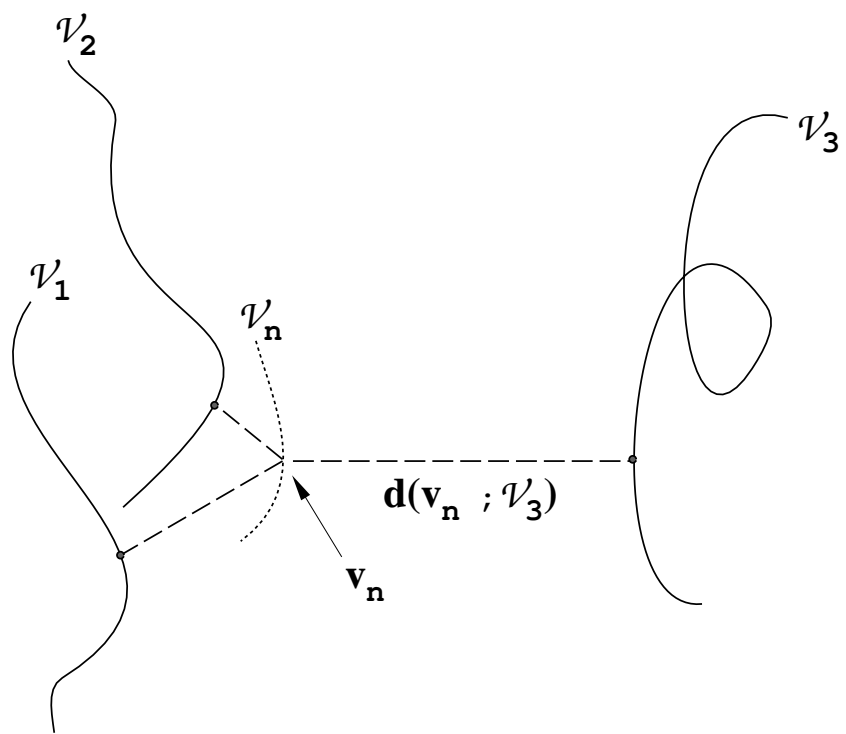

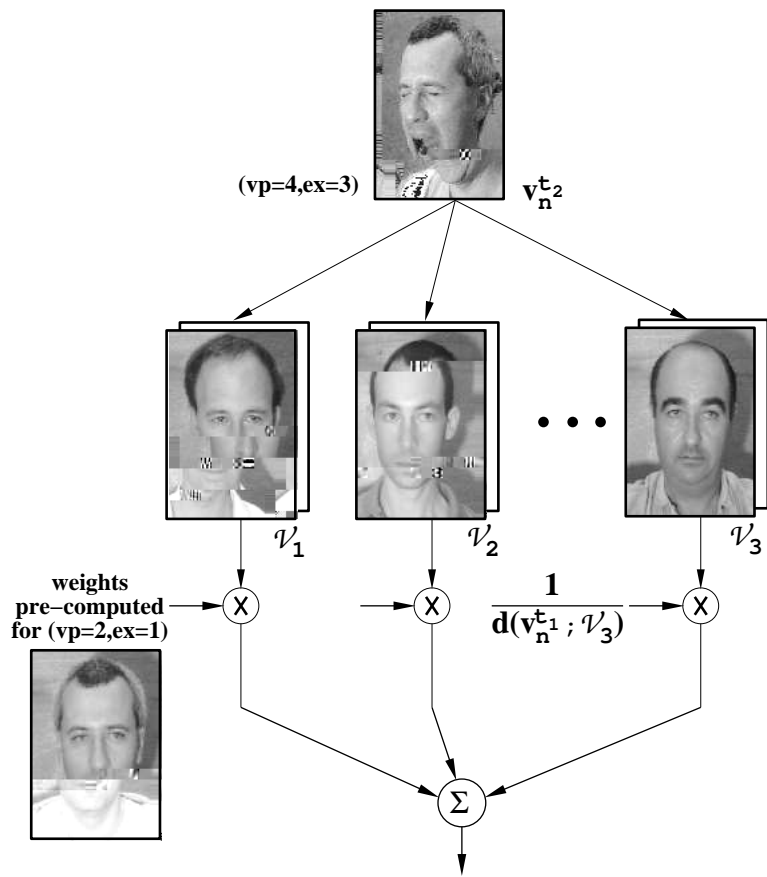


Figure 2: A mechanism for estimating the views

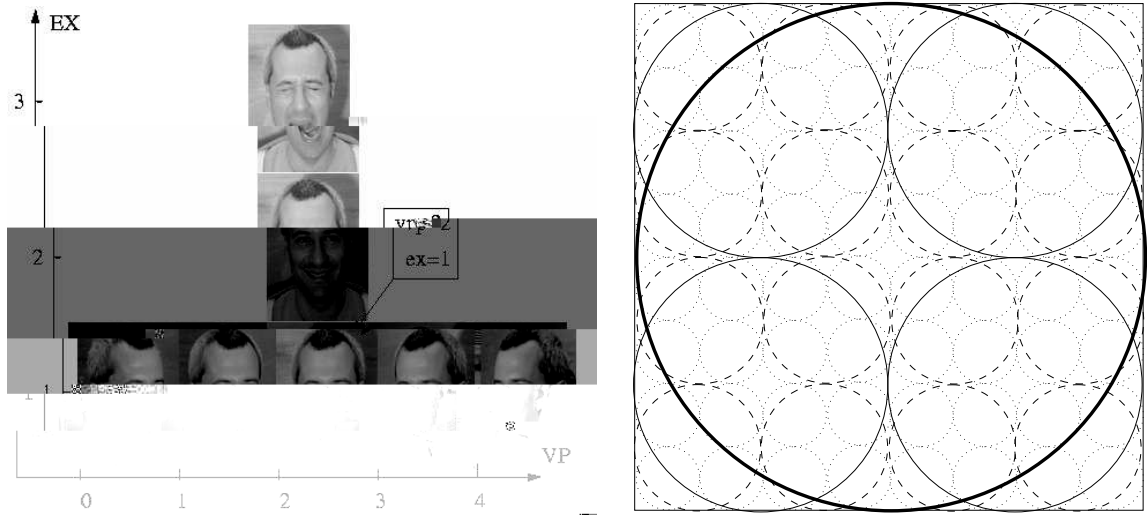


Figure 3: *Left:* the dimensions of variation in the  $(386)Tj63737.llustr(3[Wcn602.21i95c4[2f[(TTd5c8.5able131287164y695c$





- [13] T. Poggio and J. Edelman. A network that learns to recognize three-dimensional objects. *Nature*, 343:263–266, 1990.
- [14] T. Poggio and T. Vetter. Recognition and structure from one 2D model view: observations on prototypes, object classes, and symmetries. A.I. Memo No. 1347, Artificial Intelligence Laboratory, Massachusetts Institute of Technology, 1992.
- [15] D. Shepard. A two-dimensional interpolation function for irregularly spaced data. In *Proc. 23rd National Conference ACM*, pages 17–24. ACM, 1968.
- [16] S. Ullman and R. Bresnahan. Recognition by linear combinations of models. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 13:992–1000, 1991.
- [17] T. Vetter and T. Poggio. Image synthesis from single exemplar images. In B. Buxton and R. Cipolla, editors, *Proc. ECCV-96*, number 106 in Lecture Notes in Computer Science, pages 62–69, Berlin, 1996. Springer.